



# s.126 M NPT

1/2" - 2"

NPT swing check valve with metal seals



## Quality

- Suitable for domestic, industrial, pneumatic and hydraulic installations
- Robust construction
- Inspection cap

## Body

- Hot forged brass body

## Sealing

- Metal to metal sealing

## Threads


- NPT taper ANSI B.1.20.1 female by female threads

## Working pressure & temperature


- 145 psi (10 bar) non-shock cold working pressure
- +32°F to +212°F (0°C to +100°C)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

## Options

- Configuration with ISO228 female parallel threads and rubber seals from 3/8" up to 2" (s.126)
- Configuration with ISO228 female parallel threads and metal seals from 3/8" up to 2" (s.126M)

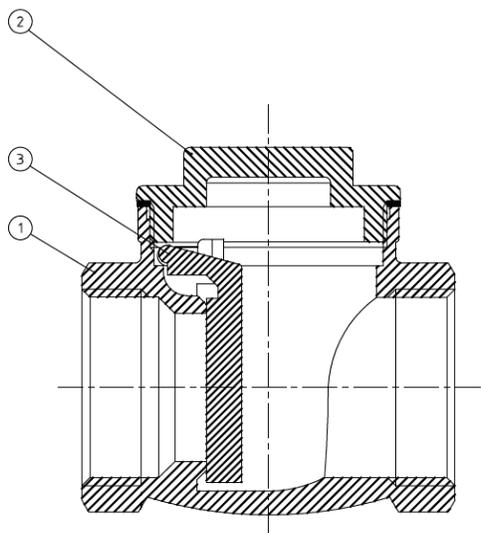

	Part description	Q.ty	Material
1	Unplated body	1	CW617N
2	Unplated bonnet	1	CW617N
3	Unplated sealing disc	1	CW617N

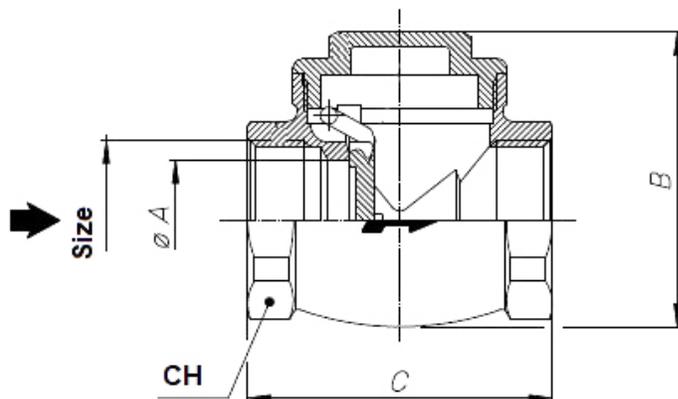

Code	126D4M	126E4M	126F4M	126G4M	126H4M	126DI4M
Size (inch)	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
ØA (inch)	0,59	0,78	0,98	1,29	1,45	1,85
B (inch)	1,81	2,00	2,40	2,87	3,34	3,70
C (inch)	1,85	2,08	2,48	2,91	3,42	3,81
CH (inch)	0,98	1,22	1,49	1,85	2,12	2,63
PN (psi)	145	145	145	145	145	145

**WARNING:** This product can expose you to chemicals including lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

XCE126MN - 0