



s.31 NPT Mini Valve

Female/Female
1/4" - 3/4"

This newly engineered valve features all the good characteristics of the s.31 **RuB** mini valve, in particular:



QUALITY:

- 100% seal test guaranteed in according to EN12266-1 RATE A in either direction
- Compatible with most industrial fluids including those too viscous for pilot operated valves
- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- No maintenance ever required
- Silicone-free lubricant
- Chrome plated ball for longer life
- Can operate also in vacuum line

BODY:

- Finest brass according to EN 12165 and EN 12164 specifications
- Strong one piece body construction
- Mounting kit to be ordered sperately "KCPA0AA00100"

STEM:

- Blowout-proof brass stem
- Maintenance-free, double FPM O-rings at the stem for maximum safety

SEALING:

- Pure PTFE self-lubricating seats

THREADS:

- NPT taper ANSI B.1.20.1 threads

WORKING PRESSURE AND TEMPERATURE:


- Shell rating: 600 PSI (40 bar) non-shock cold working pressure
- Seat rating: Delta P max permissible 230 PSI (16 bar)
- -4°F to +250°F (-20°C to +120°C)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

APPROVED BY OR IN COMPLIANCE WITH:

- RoHS Compliant (EU)

NOTE: approvals apply to specific configurations/sizes only.

Quick Connection with CP actuators

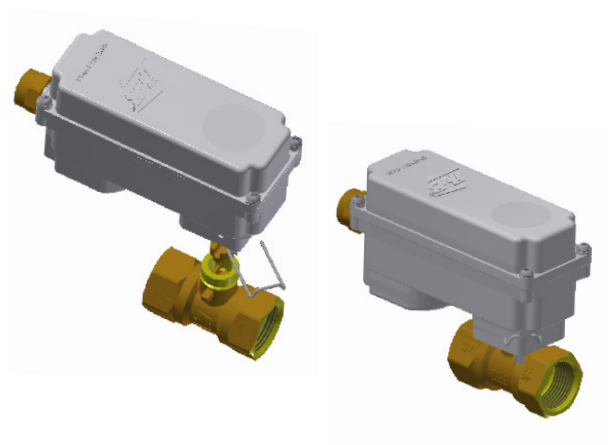

s.31 NPT XCE3141 - 5466

Each user should perform his own tests to find out the suitability for his particular application. RuB, Inc makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the RuB, Inc products with your specific field of use.



ACTUATION


	Part description	Q.ty	Material
1	Sand blasted unplated NPT body	1	CW617N
2	Unplated retainer nut	1	CW617N
3	Retainer seat	1	PTFE
4	Chrome plated ball	1	CW617N
5	Body seat	1	PTFE
6	Unplated stem O-Ring design	1	CW617N
7	O-Ring	2	FPM

Code	AV31BX3	AV31CX3	AV31DX3	AV31EX3
D (inch)	1/4"	3/8"	1/2"	3/4"
DN (inch)	0.31	0.39	0.39	0.50
I (inch)	0.47	0.47	0.61	0.67
L (inch)	1.79	1.79	2.11	2.42
G (inch)	0.94	0.94	1.10	1.28
A (inch)	0.73	0.73	0.73	0.73
H (inch)	0.89	0.89	0.89	1.00
CH (inch)	0.98	0.98	0.98	1.22



TORQUE FOR ACTUATOR SIZING LB-IN

Delta P -->	0 ÷ 230 PSI
Valve size	lb-in
1/4" ÷ 1/2"	16
3/4"	22

PRESSURE-TEMPERATURE CHART

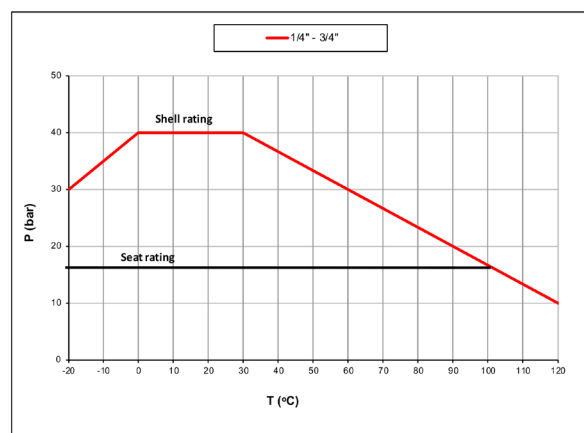

WARNING: This product can expose you to chemicals including lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

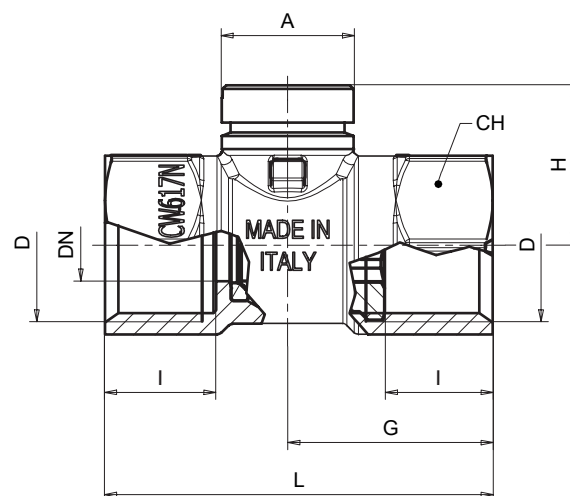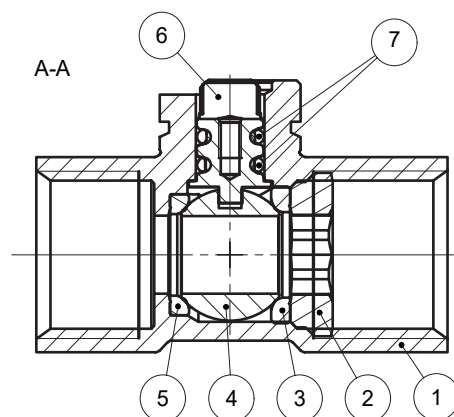

TORQUE CORRECTION FACTORS

Valve torque can vary according to operating frequency, temperature and friction characteristics of the media.

If media has more or less friction than water, multiply torque by the following factors:

Lubricating oils or liquids	0.8
Dry gases, natural gas	1.5
Slurries or liquids bearing abrasive particles	1.5÷2.5

PRESSURE DROP CHART

