



s.95 NPT nickel plated

Female/Female
1/4" - 4"



rated sizes 1/4" through 1"



QUALITY

- 24h 100% seal test guaranteed
- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- No maintenance ever required
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Handle stops on body to avoid stress at stem

BODY

- Hot forged sand blasted, nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Finest brass according to EN 12165 and EN 12164 specifications

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double FPM O-rings at the stem for maximum safety

SEALING

- Pure PTFE self-lubricating seats with flexible-lip design

THREADS

- NPT taper ANSI B.1.20.1 female by female threads

FLOW

- Full port to DIN 3357 for maximum flow

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- Handle removable with valve in service
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 600 PSI (40 bar) up to 2", 450 PSI (30 bar) over 2" non-shock cold working pressure
- 250 PSI (17 bar) non-shock working pressure for LP-Gas
- -40°F to +350°F (-40°C to +170°C)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Stainless steel ball (1.4401 / AISI 316)
- Glass filled PTFE seals
- Custom design
- Special configuration for industrial oxygen application

APPROVED BY OR IN COMPLIANCE WITH

- Canadian standards Association (United States, Canada)
- Factory Mutual (United States)
- RoHS Compliant (EU)
- EAC – Declaration of conformity (Russia, Kazakhstan, Belarus)
- Underwriters Laboratories (United States, Canada):
 - Guide YSDT: LP-Gas shut-off valve
 - Guide YRBX: Flammable liquid shut-off valve
 - Guide YRPV: Gas shut-off valve for use with natural and manufactured gases
 - Guide MHKZ: No. 6 oil at 250°F

NOTE: approvals apply to specific configurations/sizes only.

OPTIONS UP TO 2" SIZE

- Stem extension
- Oval lockable handle up to 2", round over 2" **1**
- **RuB** memory stop designed to be installed with our stubby handle **2**
- Stainless steel handle (1.4016 / AISI 430) **3**
- Patented locking device for valves up to 4"
- Stubby handle **4**
- T-handle **5**




s.95 NPT NICKEL PLATED XCES95N - 5813

Each user should perform his own tests to find out the suitability for his particular application. RuB, Inc makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the RuB, Inc products with your specific field of use.



| | Part description | Q.ty | Material |
|---|--|------|-----------------|
| 1 | Nickel plated NPT body | 1 | CW617N |
| 2 | Seat | 2 | PTFE |
| 3 | Chrome plated ball | 1 | CW617N |
| 4 | Nickel plated NPT end-cap | 1 | CW617N |
| 5 | Nickel plated stem O-ring design | 1 | CW617N |
| 6 | Geomet® nut | 1 | C4C (EN10263-2) |
| 7 | O-Ring | 2 | FPM |
| 8 | Yellow PVC coated Geomet® steel handle | 1 | DD11 (EN10111) |

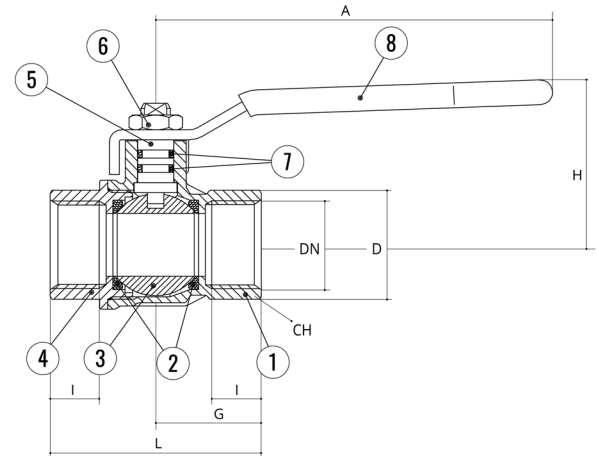


1 1/4"-2" hollow ball


| Code | S95B41N | S95C41N | S95D41N | S95E41N | S95F41N | S95G41N | S95H41N | S95I41N | S95L41N | S95M41N | S95N41N |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| D (inch) | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" | 2 1/2" | 3" | 4" |
| DN (inch) | 0.315 | 0.374 | 0.591 | 0.748 | 0.945 | 1.181 | 1.496 | 1.890 | 2.520 | 2.992 | 3.937 |
| I (inch) | 0.472 | 0.472 | 0.610 | 0.669 | 0.827 | 0.906 | 0.906 | 1.043 | 1.260 | 1.377 | 1.633 |
| L (inch) | 1.772 | 1.772 | 2.323 | 2.520 | 3.189 | 3.661 | 4.016 | 4.764 | 6.142 | 6.969 | 8.504 |
| G (inch) | 0.886 | 0.886 | 1.161 | 1.260 | 1.594 | 1.831 | 2.008 | 2.382 | 3.071 | 3.484 | 4.252 |
| A (inch) | 3.228 | 3.228 | 3.937 | 4.724 | 4.724 | 6.220 | 6.220 | 6.220 | 10.039 | 10.039 | 10.039 |
| H (inch) | 1.480 | 1.480 | 1.679 | 1.956 | 2.114 | 2.858 | 3.094 | 3.370 | 5.197 | 5.512 | 6.063 |
| CH (inch) | 0.669 | 0.787 | 0.984 | 1.220 | 1.575 | 1.929 | 2.126 | 2.697 | 3.346 | 3.898 | 4.921 |
| Cv (GPM) | 4.5 | 9.5 | 32.3 | 48.5 | 80.9 | 92.4 | 144.4 | 206.8 | 596.2 | 896.5 | 1305.5 |

DN shows the nominal flow diameter. Actual flow diameter complies with full port DIN 3357 part 4. Stem configuration of valves over 2" is slightly different.

PRESSURE-TEMPERATURE CHART

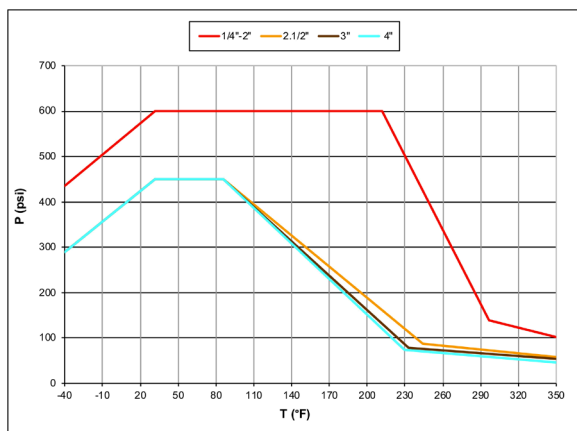

PRESSURE DROP CHART

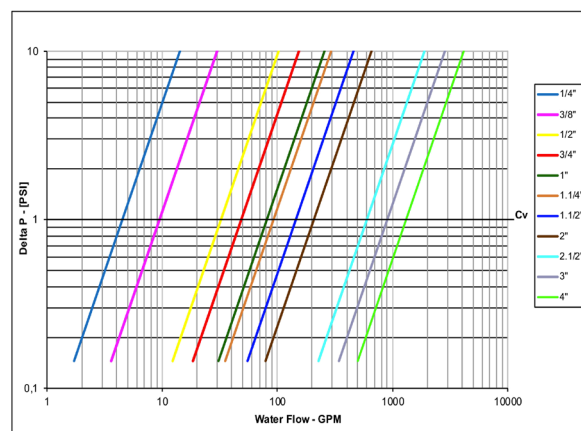

WARNING: This product can expose you to chemicals including lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

RuB, Inc. - www.rubinc.com