



s.95 NPT T-handle

Female/Female
1/4" - 2"



QUALITY

- 24h 100% seal test guaranteed
- Dual sealing system allows valve to be operated in either direction making installation easier
- No metal-to-metal moving parts
- No maintenance ever required
- Handle clearly shows ball position
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Handle stops on body to avoid stresses at stem

BODY

- Hot forged sand blasted, unplated brass body and cap sealed with Loctite® or equivalent thread sealant
- Finest brass according to EN 12165 and EN 12164 specifications

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double FPM O-rings at the stem for maximum safety

SEALING

- Pure PTFE self-lubricating seats with flexible-lip design

THREADS

- NPT taper ANSI B.1.20.1 female by female threads

FLOW

- Full port to DIN 3357 for maximum flow

HANDLE

- Aluminium T-handle, painted yellow up to 1", Geomet® steel T-handle with PVC dip coating for 1 1/4" - 2" sizes
- **WARNING:** do not exceed reasonable temperature and/or electrical load
- Handle removable with valve in service

WORKING PRESSURE & TEMPERATURE

- 600 PSI (40 bar) non-shock cold working pressure
- 250 PSI (17 bar) non-shock working pressure for LP-Gas
- -40°F to +350°F (-40°C to +170°C)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST

- Stainless steel ball (1.4401 / AISI 316)
- Glass filled PTFE seals
- Custom design
- Special configuration for industrial oxygen application

APPROVED BY OR IN COMPLIANCE WITH

- Canadian standards Association (United States, Canada)
- Factory Mutual (United States)
- RoHS Compliant (EU)
- EAC – Declaration of conformity (Russia, Kazakhstan, Belarus)
- Underwriters Laboratories (United States, Canada):
 - Guide YSDT: LP-Gas shut-off valve
 - Guide YRBX: Flammable liquid shut-off valve
 - Guide YRPV: Gas shut-off valve for use with natural and manufactured gases
 - Guide MHKZ: No. 6 oil at 250°F
- CRN-TSSA acc. to MSS SP110 (Canada)
- Meeting WW-V-35C Federal U.S. Specification (United States)

NOTE: approvals apply to specific configurations/sizes only.

OPTIONS

- Stem extension
- Oval lockable handle **1**
- **RuB** memory stop designed to be installed with our stubby handle **2**
- Geomet® carbon steel handle with thick PVC dip coating
- Stainless steel handle (1.4016 / AISI 430) **3**
- Patented locking device
- Stubby handle **4**



s.95 NPT T-handle XCES9546 - 5813

Each user should perform his own tests to find out the suitability for his particular application. RuB, Inc makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the RuB, Inc products with your specific field of use.



GAS


	Part description	Q.ty	Material
1	Unplated NPT body	1	CW617N
2	Seat	2	PTFE
3	Chrome plated ball	1	CW617N
4	Unplated NPT end-cap	1	CW617N
5	Nickel plated stem O-ring design	1	CW617N
6	Geomet® nut	1	C4C (EN10263-2)
7	O-Ring	2	FPM
8	Yellow T-handle	1	EN AC-46100 (EN1676)
9	Geomet® steel T-handle	1	DD01 (EN10111)
10	Yellow dipped coating	2	PVC

1 1/4"-2" hollow ball


Code	S95B46	S95C46	S95D46	S95E46	S95F46	S95G46
D (inch)	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"
DN (mm)	0.315	0.374	0.591	0.748	0.945	1.181
I (mm)	0.472	0.472	0.610	0.669	0.827	0.906
L (mm)	1.772	1.772	2.323	2.520	3.189	3.661
G (mm)	0.886	0.886	1.131	1.260	1.594	1.831
A (mm)	0.984	0.984	0.984	1.181	1.181	2.244
H (mm)	1.535	1.535	1.692	1.850	2.008	3.326
CH (mm)	0.669	0.787	0.984	1.220	1.575	1.929
Cv (GPM)	4.5	9.5	32.3	48.5	80.9	92.4

DN shows the nominal flow diameter. Actual flow diameter complies with full port DIN 3357 part 4.

PRESSURE-TEMPERATURE CHART

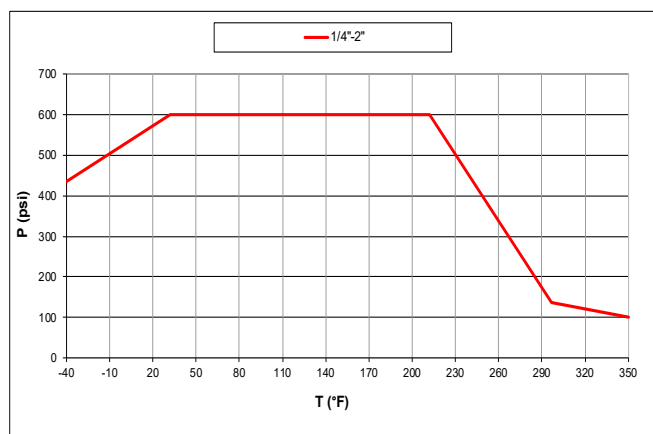

PRESSURE DROP CHART

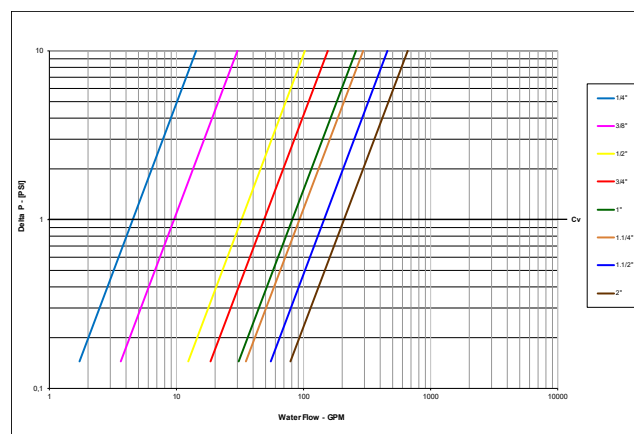

WARNING: This product can expose you to chemicals including lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

RuB, Inc. - www.rubinc.com