



s.7641L

3-way, lever, 2 seats, L-port (diverting)

Female/Female/Female
1/2" - 2"

The **RuB** s.7641L is the right choice for fluid diversion and is designed with robust maintenance-free components ensuring ease of operation and safety. With a simple 90° turn, you can divert flow from one downstream outlet to the other. It combines traditional manual operation with modern automation. It is also very easy to convert from its sturdy lever handle to ISO 5211 actuator flange assembly. It features low operating torque and a special wear reducing self-compensating valve seat design that meets our 100,000 cycle life test requirement. The valve can be purchased separately, with handle or with a **RuB** actuator already mounted.



QUALITY

- Electronic 100% seal test guaranteed for maximum safety
- No metal-to-metal moving parts
- No maintenance ever required
- Silicone-free lubricant on all seals
- Chrome plated brass ball for longer life
- Each valve is seal tested for maximum safety
- Performs well in any orientation
- Strong configuration

BODY

- Hot forged sand blasted, external nickel plated brass body and cap sealed with Loctite® or equivalent thread sealant
- Integrated ISO5211 / DIN3337 mounting flange for universal connection to actuator
- Finest brass according to EN 12165 and EN 12164 specifications
- 3-way L-port design for flow diversion

STEM

- Blowout-proof nickel plated brass stem
- Maintenance-free, double O-rings at the stem for maximum safety

SEALING

- Reinforced PTFE self-lubricating seats with flexible-lip and wear compensation design

THREADS

- NPT taper ANSI B.1.20.1 female by female threads

FLOW

- 100% full port for maximum flow

HANDLE

- Geomet® carbon steel handle with thick PVC dip coating. Handle coating offers both thermal and electrical protection
- Handle removable with valve in service
- **WARNING:** do not exceed reasonable temperature and/or electrical load

WORKING PRESSURE & TEMPERATURE

- 450 PSI (30 bar) up to 1", 300 PSI (20 bar) over 1", non-shock cold working pressure
- -4°F to +350°F (-20°C to +170°C)
- **WARNING:** freezing of the fluid in the installation may severely damage the valve

UPON REQUEST


- Custom design
- Stainless steel stem (1.4401/ AISI 316)
- Configurations with 4 seats, L-port (s.7241L) or T-port (s.7341L)

APPROVED BY OR IN COMPLIANCE WITH

- RoHS Compliant (EU)
- EAC – Declaration of conformity (Russia, Kazakhstan, Belarus)

NOTE: approvals apply to specific configurations/sizes only.

S.76 3-WAY "L" PORT OPERATING POSITIONS

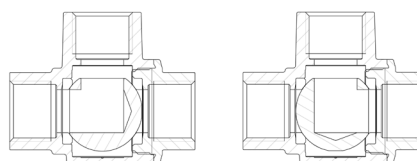

OPTIONS

- Rack and pinion pneumatic actuator (spring return or double acting)
- Compact Power electric actuator
- S.7641 without handle, actuator ready
- Various actuator linkage kit



s.7641L XCES7641L - 5813



Each user should perform his own tests to find out the suitability for his particular application. RuB, Inc makes no warranty, express or implied, as to the shape, fit or function of a product for any application. Contact us or consult with your supplier for additional information on the suitability of the RuB, Inc products with your specific field of use.





INDUSTRY

Part description	Q.ty	Material
1 Sand blasted unplated body	1	CW617N
2 Seat	2	PTFE graphite filled 15%
3 Chrome plated ball	1	CW617N
4 Sand blasted unplated end-cap	1	CW617N
5 Washer	1	PTFE carbon filled 25%
6 Nickel plated stem O-ring design	1	CW617N
7 O-Ring	2	FPM
8 O-Ring	2	FPM
9 Geomet® plated steel handle	1	DD11(EN10111)
10 Black dipped coating	1	PVC
11 Stainless steel screw	1	1.4401 / AISI304
12 Unplated stop	1	CW617N
13 Zinc plated steel nut	1	Class 8 (UNI7474)
14 Stainless steel Exagonal screw	1	1.4401 / AISI304
15 Unplated cap	1	CW614N
16 Washer	1	PTFE

Code	S76D41L	S76E41L	S76F41L	S76G41L	S76H41L	S76I41L
Size (inch)	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
DN (inch)	0.591	0.787	0.984	1.197	1.496	1.890
I (inch)	0.610	0.709	0.827	0.906	0.965	1.043
L (inch)	2.559	3.110	3.642	4.311	4.961	5.906
G (inch)	1.280	1.555	1.831	2.165	2.480	2.953
H (inch)	1.280	1.555	1.673	2.205	2.500	2.854
N (inch)	1.358	1.654	1.949	2.362	2.717	3.228
A (inch)	3.819	3.819	3.819	5.709	5.709	5.709
ØC (inch)	Ø 0.22	Ø 0.22	Ø 0.22	Ø 0.26	Ø 0.26	Ø 0.26
H1 (inch)	0.984	0.984	0.984	1.378	1.378	1.378
Square B (inch)	0.354	0.354	0.354	0.551	0.551	0.551
CH A/F (inch)	1.063	1.260	1.614	1.969	2.165	2.756
Flange connection DIN ISO 5211 DIN 3337	F03	F03	F03	F05	F05	F05
P (ISO 262 Thread)	M4	M4	M4	M5	M5	M5
CV (GPM)	6.6	12.9	19.3	32.5	51.4	82.2

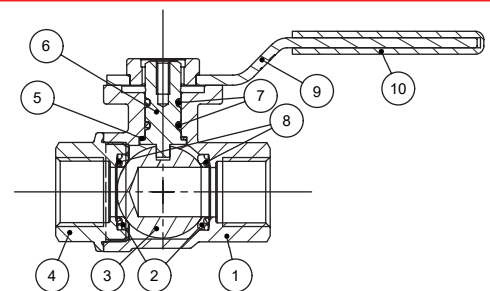

1.1/4"-1.1/2"-2" handle configuration

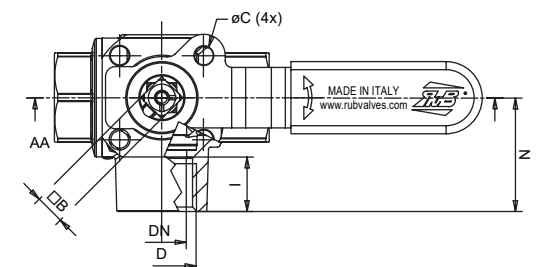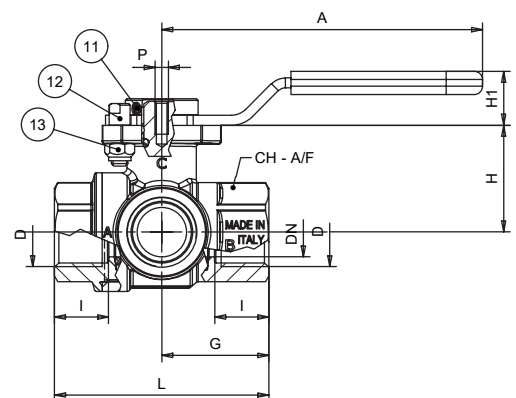

TORQUE FOR ACTUATOR SIZING LB-IN


Delta P --> Valve size	0÷230 PSI	
	to open	to close
1/2"	31	31
3/4"	36	36
1"	40	40
1 1/4"	104	104
1 1/2"	190	190
2"	248	248

TORQUE CORRECTION FACTORS

Valve torque can vary according to operating frequency, temperature and friction characteristics of the media. If media has more or less friction than water, multiply torque by the following factors:

Lubricating oils or liquids	0.8
Dry gases, natural gas	1.5
Slurries or liquids bearing abrasive particles	1.5÷2.5

PRESSURE DROP CHART

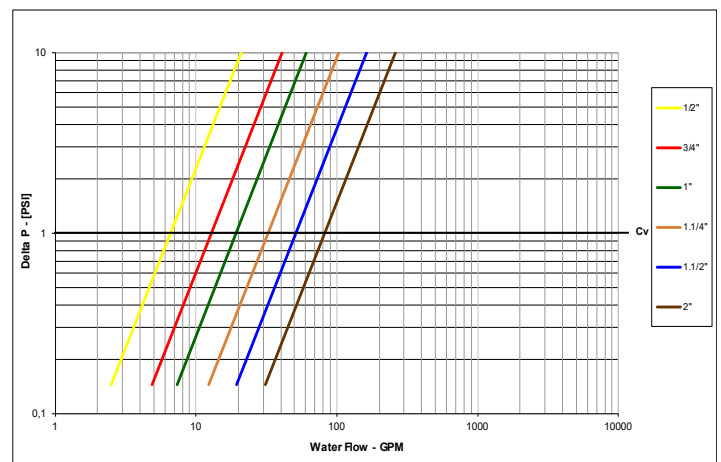

WARNING: This product can expose you to chemicals including lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

RuB, Inc. - www.rubinc.com